


CONTACT PAD PATTERNS

OBLONG DOUBLE-SIDED (suitable for RK-series or E-series oblong domes)

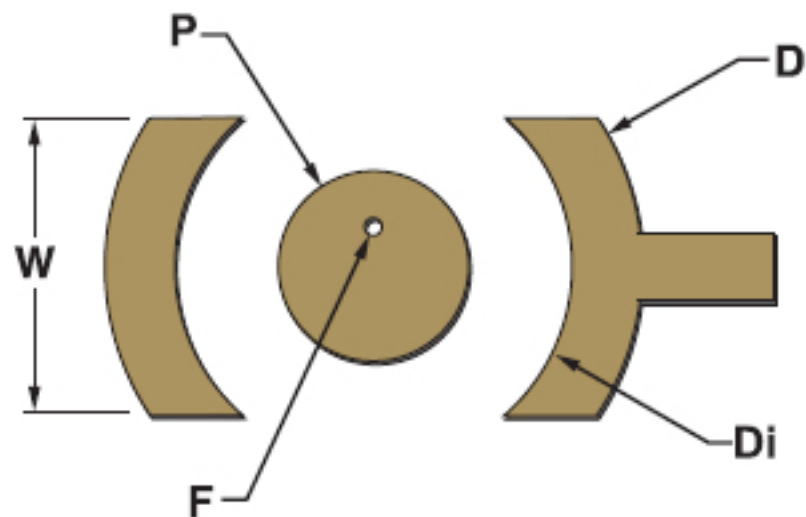

Via hole offset is to maximize center contact area

Vent hole through the board is suggested

SERIES	DIAMETER	"D"	"Di"	"W"	"P"	"F"
RK-Series	.165"x .220"	.260	.190	.180	.100	.024
	.280"x .350"	.400	.300	.300	.150	.035
	.400"x .500"	.550	.450	.430	.200	.035
E-Series	.220"x .440"	.500	.400	.270	.190	.035
	.350"x .700"	.750	.650	.400	.270	.035
	.500"x 1.00"	1.050	.950	.550	.350	.035

* These drawings represent one of many possible layouts. Snaptron conveys this information for our customer support with the intent that customers are responsible for the final design on the P.C.B. layout.